



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 810 795 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:  
03.12.1997 Bulletin 1997/49

(51) Int. Cl.<sup>6</sup>: H04N 9/04

(21) Application number: 97201496.3

(22) Date of filing: 16.05.1997

(84) Designated Contracting States:  
DE FR GB

(30) Priority: 29.05.1996 US 655107

(71) Applicant: EASTMAN KODAK COMPANY  
Rochester, New York 14650-2201 (US)

(72) Inventors:  
• Hamilton, John F., Jr.,  
Eastman Kodak Company  
Rochester, New York 14650-2201 (US)

• Adams, James E., Jr.,  
Eastman Kodak Company  
Rochester, New York 14650-2201 (US)

(74) Representative:  
Parent, Yves et al  
KODAK INDUSTRIE  
Département Brevets - CRT  
Zone Industrielle  
B.P. 21  
71102 Chalon-sur-Saône Cédex (FR)

(54) A particular pattern of pixels for a color filter array which is used to derive luminance and chrominance values

(57) A color filter array for an image sensor which has a plurality of pixels is disclosed. The color filter array includes a plurality of color pixel kernels, with each kernel having a plurality of pixels arranged in the following pattern

M	G	C	Y
G	M	Y	C
Y	C	G	M
C	Y	M	G

M	G	C	Y
G	M	Y	C
Y	C	G	M
C	Y	M	G

FIG. 2

wherein:

M is magenta;  
G is green;  
C is cyan; and  
Y is yellow.

## Description

In electronic color imaging, it is desirable to simultaneously capture image data in three color planes, usually red, green and blue. When the three color planes are combined, it is possible to create high-quality color images. Capturing these three sets of image data can be done in a number of ways. In electronic photography, this is sometimes accomplished by using a single two dimensional array of sensors that are covered by a pattern of red, green and blue filters. This type of sensor is known as a color filter array or CFA. Below is shown the red (R), green (G) and blue (B) pixels as are commonly arranged on a CFA sensor.

When a color image is captured using a CFA, it is necessary to interpolate the red, green and blue values so that there is an estimate of all three color values for each sensor location. Once the interpolation is done, each picture element, or pixel, has three color values and can be processed by a variety of known image processing techniques depending on the needs of the system. Some examples of the reasons for processing are to do image sharpening, color correction or halftoning.

The diagram below shows how red green and blue pixels can be arranged in a particular color filter array pattern, hereinafter referred to as the Bayer color filter array. For a more detailed description see US-A-3,971,065.

G	R	G	R
B	G	B	G
G	R	G	R
B	G	B	G

Adaptive methods of calculating green pixel values at pixels where green is not directly measured produce better reconstructions for horizontal and vertical features than they are for diagonal features in the image. This is because there are green pixels in every row and every column of the CFA. However, every other diagonal in the CFA is devoid of green pixels. With this arrangement, the frequency response on diagonals is less than that on horizontal rows and vertical columns. As a consequence, diagonal edges are less sharp than horizontal and vertical edges. Moreover, interpolation of green values in the diagonal direction is not available. It would be desirable to have a CFA pattern in which diagonal interpolation, in addition to horizontal and vertical interpolation, would be available.

It is an object of the present invention is to provide a color filter array pattern which provides signals which can be efficiently processed.

It is a further object of the invention to have a CFA pattern in which diagonal interpolation, in addition to horizontal and vertical interpolation, is available.

This object is achieved in a color filter array for an image sensor which has a plurality of pixels, a color filter array comprising:

(a) a plurality of color pixel kernels, with each kernel having a plurality of pixels arranged in the following pattern

X1	Y1
Y2	X2

(i) wherein X1 and X2 respectively represent luminance values wherein the sum of their individual colors are luminance and the difference of their individual colors are chrominance; and

(ii) wherein Y1 and Y2 respectively represent luminance values wherein the sum of their individual colors are luminance and the difference of their individual colors are chrominance.

This invention permits non-linear interpolation of luminance values in not only horizontal and vertical but also in diagonal directions, regardless of location within the CFA pattern.

Another advantage of the present invention is that the same processing can be used irrespective of the location of the pixels in the CFA.

Another advantage of the present invention is that it facilitates the use of the smallest kernel of CFA pixels can be used to provide a high quality estimate of luminance.

FIG. 1 is a plan view of a generalized kernel of a color filter array in accordance with the present invention;  
 FIG. 2 is a plan view of a particular embodiment of a kernel of a color filter array in accordance with the present invention;  
 FIG. 3 is a cross-sectional view taken along the lines 3-3 of an area image sensor FIG. 2 and shown in schematic form including the arrangement of dye-receiving layers;  
 FIG. 4 is a plan view of the embodiment shown in FIG. 2 with subscript numbers added to show rows and columns; and  
 FIG. 5 is a plan view of another embodiment of a kernel of a color filter array in accordance with the present invention.

FIG. 1 is a plan view of a new four-color CFA kernel. The colors are chosen so that  $V = (A+B)/2 = (C+D)/2$ , where V is luminance. By use of the term "kernel" is meant a minimal repeating pattern of color pixels of a CFA filter that is two-dimensionally replicated over the full extent of the color filter array. In a preferred embodiment set of colors is A = magenta (M), B = green (G), C = cyan (C) and D = yellow (Y). Expressing this set of colors in terms of red (R), green (G) and blue (B):

$$M = (R+B)/2$$

$$G = G$$

$$C = (G+B)/2$$

$$Y = (R+G)/2$$

Under these definitions,  $V = (R+2G+B)/4$ . This preferred embodiment is shown in FIG. 2 wherein the pattern has green, magenta, and yellow pixels.

FIG. 3 is a cross-sectional view of an area image sensor 10 taken along the lines 3-3 of FIG. 2. As shown, the image sensor 10 includes a silicon substrate 12 into which is doped pixel areas 14. In this particular embodiment, there are two dye-receiving layers 16 and 18 respectively formed on the silicon substrate 12. In this arrangement, the dye pattern shown in FIG. 2 is exemplified. It should be noted that a yellow portion is disposed directly over a cyan dye portion. These portions are aligned with a particular image sensor pixel. The combination of the yellow and cyan portions forms the green pixels shown in FIG. 2. Although the superimposed cyan and yellow colored portions are preferably the same cyan and yellow dyes shown in the dye-receiving layers 16, it will be understood by those skilled in the art that different cyan and yellow dyes can be used to form a green pixel. For an example of a color filter array which uses different color dyes, see commonly assigned US-A-5,419,990.

Due to the arrangement of color filter array pattern shown in FIG. 2, V can be interpolated in four distinct directions at each location in the CFA. This produces a rich set of predictors that can be used by adaptive CFA interpolation routines. In FIG. 4, the same color pixel kernel shown as in FIG. 2; however, in FIG. 4 each of the pixels carry a subscript number. The first number in the subscript corresponds to the row and the second subscript corresponds to the column. For clarity of illustration, FIG. 4 has been shown as a 5x5, although the kernel, of course, is still 4x4. Most notably, at each location in the pattern, V can be estimated in the horizontal, vertical, positive slope diagonal and negative slope diagonal directions. The value  $V_{33}$  can be calculated as below:

$$V_{33} = (Y_{31} + 2C_{32} + 2G_{33} + 2M_{34} + Y_{35})/8 \quad (\text{Eqs. 1})$$

$$V_{33} = (C_{13} + 2Y_{23} + 2G_{33} + 2M_{43} + C_{53})/8$$

$$V_{33} = (M_{15} + 2C_{24} + 2G_{33} + 2Y_{42} + M_{51})/8$$

$$V_{33} = (M_{11} + 2M_{22} + 2G_{33} + 2G_{44} + M_{55})/8$$

Two chrominance channels are also defined for this pattern:  $C_1 = K_1(D-C)$  and  $C_2 = K_2(A-B)$ . The values  $K_1$  and  $K_2$  are scaling constants. In the preferred embodiment of FIG. 2,  $K_1 = 1$ ,  $K_2 = 1/2$  and, as before, A = M, B = G, C = C and D = Y. As a result, once a luminance value has been calculated for each pixel location,  $C_1$  or  $C_2$  can be calculated directly. Missing values of  $C_1$  and  $C_2$  can be interpolated in standard ways well understood by those in the art, for example, using the average of two neighboring pixels.

Once there is a value of V,  $C_1$  and  $C_2$  at each pixel location, corresponding values of R, G and B can be obtained through a simple linear transform.

In accordance with the above discussion, A and B are defined to be companion colors in that the sum of the colors

is proportional to luminance and the difference of the colors is proportional to chrominance. Likewise, C and D are also companion colors.

FIG. 5 shows an alternative embodiment of the present invention. It should be noted that the kernel pattern of FIG. 5 is similar to that shown in FIG. 2 with the exception that the cyan pixels are replaced by yellow pixels and the yellow pixels are replaced by cyan pixels. It should now be clear that these colors can be handled in a similar fashion using Equations 1.

#### Parts List

- 10 image sensor
- 12 silicon substrate
- 14 pixel areas
- 16 dye-receiving layers
- 18 dye-receiving layers

#### Claims

1. A color filter array for an image sensor which has a plurality of pixels, a color filter array comprising:

(a) a plurality of color pixel kernels, with each kernel having a plurality of pixels arranged in the following pattern

X <sub>1</sub>	Y <sub>1</sub>
Y <sub>2</sub>	X <sub>2</sub>

- (i) wherein X<sub>1</sub> and X<sub>2</sub> respectively represent luminance values wherein the sum of their individual colors are luminance and difference of their individual colors are chrominance; and
- (ii) wherein Y<sub>1</sub> and Y<sub>2</sub> respectively represent luminance values wherein the sum of their individual colors are luminance and difference of their individual colors are chrominance

2. A color filter array for an image sensor which has a plurality of pixels, a color filter array comprising:

(a) a plurality of color pixel kernels, with each kernel having a plurality of pixels arranged in the following pattern

A	B	C	D
B	A	D	C
D	C	B	A
C	D	A	B

wherein:

A and B are companion colors; and  
C and D are companion colors.

3. A color filter array for an image sensor which has a plurality of pixels, a color filter array comprising:

(a) a plurality of color pixel kernels, with each kernel having a plurality of pixels arranged in the following pattern

M	G	C	Y
G	M	Y	C
Y	C	G	M
C	Y	M	G

wherein:

M is magenta;  
G is green;  
C is cyan; and  
Y is yellow.

4. A color filter array for an image sensor which has a plurality of pixels, a color filter array comprising:

(a) a plurality of color pixel kernels, with each kernel having a plurality of pixels arranged in the following pattern

M	G	Y	C
G	M	C	Y
C	Y	G	M
Y	C	M	G

wherein:

M is magenta;  
G is green;  
C is cyan; and  
Y is yellow.

A	B	C	D
B	A	D	C
D	C	B	A
C	D	A	B

FIG. 1

M	G	C	Y
G	M	Y	C
Y	C	G	M
C	Y	M	G

FIG. 2

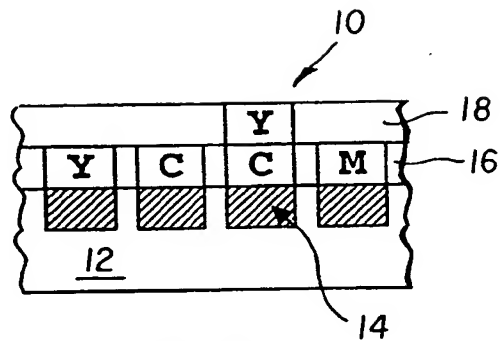



FIG. 3

$M_{11}$	$G_{12}$	$C_{13}$	$Y_{14}$	$M_{15}$
$G_{21}$	$M_{22}$	$Y_{23}$	$C_{24}$	$G_{25}$
$Y_{31}$	$C_{32}$	$G_{33}$	$M_{34}$	$Y_{35}$
$C_{41}$	$Y_{42}$	$M_{43}$	$G_{44}$	$C_{45}$
$M_{51}$	$G_{52}$	$C_{53}$	$Y_{54}$	$M_{55}$

FIG. 4

M	G	Y	C
G	M	C	Y
C	Y	G	M
Y	C	M	G

FIG. 5



(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 810 795 A3

(12)

**EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
12.01.2000 Bulletin 2000/02

(51) Int. Cl.<sup>7</sup>: H04N 9/04

(43) Date of publication A2:  
03.12.1997 Bulletin 1997/49

(21) Application number: 97201496.3

(22) Date of filing: 16.05.1997

(84) Designated Contracting States:  
DE FR GB

(30) Priority: 29.05.1996 US 655107

(71) Applicant: EASTMAN KODAK COMPANY  
Rochester, New York 14650-2201 (US)

(72) Inventors:  
• Hamilton, John F., Jr.,  
Eastman Kodak Company  
Rochester, New York 14650-2201 (US)

• Adams, James E., Jr.,  
Eastman Kodak Company  
Rochester, New York 14650-2201 (US)

(74) Representative:  
Parent, Yves et al  
KODAK INDUSTRIE  
Département Brevets - CRT  
Zone Industrielle  
B.P. 21  
71102 Chalon-sur-Saône Cédex (FR)

(54) **A particular pattern of pixels for a color filter array which is used to derive luminance and chrominance values**

(57) A color filter array for an image sensor which has a plurality of pixels is disclosed. The color filter array includes a plurality of color pixel kernels, with each kernel having a plurality of pixels arranged in the following pattern

M	G	C	Y
G	M	Y	C
Y	C	G	M
C	Y	M	G

M	G	C	Y
G	M	Y	C
Y	C	G	M
C	Y	M	G

FIG. 2

wherein:

M is magenta;  
G is green;  
C is cyan; and  
Y is yellow.

EP 0 810 795 A3



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 97 20 1496

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	US 5 136 370 A (CHI YOUNG-BAE) 4 August 1992 (1992-08-04) * column 2, line 57 - column 3, line 62 *	1-4	H04N9/04
A	US 5 115 302 A (WATANABE TAKASHI) 19 May 1992 (1992-05-19) * column 2, line 6 - line 19; figure 8 *	1-4	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			H04N
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>19 November 1999</b>	Examiner <b>Bequet, T</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone  Y : particularly relevant if combined with another document of the same category  A : technological background  O : non-written disclosure  P : intermediate document</p> <p>T : theory or principle underlying the invention  E : earlier patent document, but published on, or after the filing date  D : document cited in the application  L : document cited for other reasons  &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/82 (P04C01)



**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 97 20 1496

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

19-11-1999

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 5136370	A	04-08-1992	GB	2240901 A	14-08-1991
US 5115302	A	19-05-1992	JP	2744705 B	28-04-1998
			JP	4211594 A	03-08-1992

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**THIS PAGE BLANK (USPTO)**